


# POWERWALL

## Multi-Powerwall Stack Kit

The Stack Kit for Tesla Powerwall joins two floor-mounted Powerwall units in front-to-back multi-Powerwall installations. Side clips and a top cover secure the units and prevent debris from falling between them. An optional bridge assembly conceals wire runs between the Powerwalls, preserving the clean lines of the installation.

Up to 3 floor-mounted Powerwalls can be joined using two Stack Kits. For systems with more than 3 Powerwalls, separate groups of 3 units should be assembled.

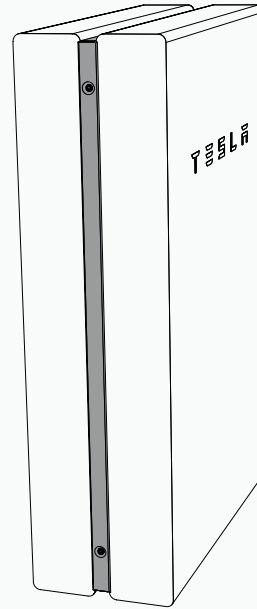

## ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-20°C to 50°C (-4°F to 122°F)
Operating Humidity (RH)	Up to 100%, condensing
Environment	Indoor and outdoor rated
Ingress Rating	IP67

## COMPLIANCE INFORMATION

Certifications	UL 1741, IEC 62109-1, CSA C22.2.107.1
Environmental	RoHS Directive 2011/65/EU, REACH Regulation
Seismic	AC156, IEEE 693-2005 (high)

## MECHANICAL SPECIFICATIONS

Stack Kit Shipping Dimensions	1134 mm x 175 mm x 48 mm (44.6 in x 6.9 in x 1.9 in)
Stack Kit Shipping Weight	2.2 kg (4.8 lbs)
Materials	Powder-coated steel, stainless steel, galvanized steel, high-impact plastic
<b>2-Powerwall Stack</b>	
Dimensions	1150 mm x 755 mm x 313 mm (45.3 in x 29.7 in x 12.3 in)
Weight (including 2 Powerwalls)	253 kg (556 lbs)
<b>3-Powerwall Stack</b>	
Dimensions	1150 mm x 755 mm x 475 mm (45.3 in x 29.7 in x 18.7 in)
Weight (including 3 Powerwalls)	379.5 kg (837 lbs)

